


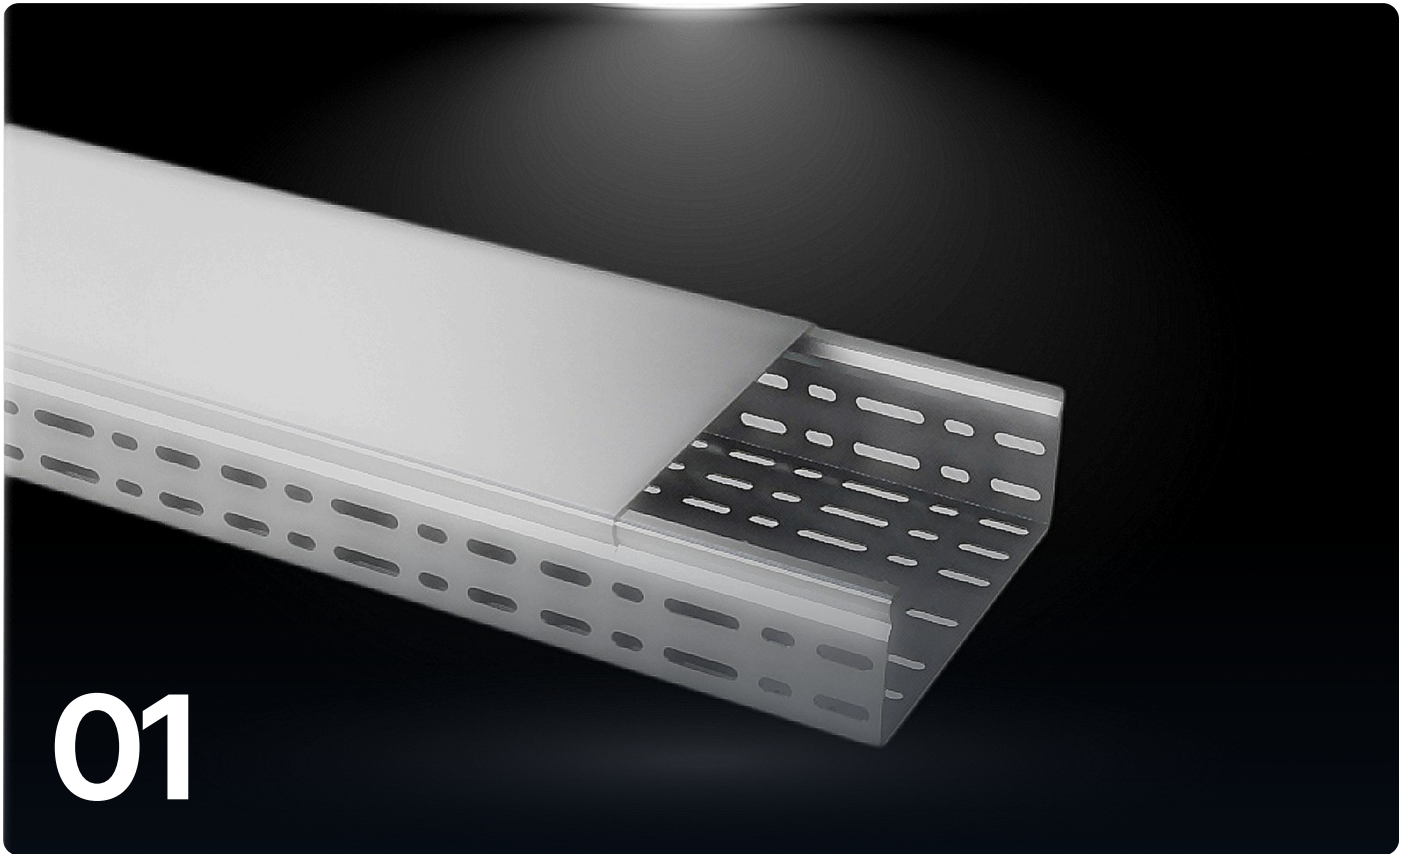

01

PART 1 OF 4 · CABLE MANAGEMENT SYSTEMS

Cable trays

Perforated and solid trays, fittings and covers, in light, medium and heavy duty.

■ Straight sections

■ Horizontal fittings

■ Vertical fittings

■ Covers

Part numbers and finishes

Every CASK Steel part number describes the product. Read the size from the tables, then add the finish code. The ERP builds the same number from the size, so offers, orders and the catalogue always match.

CST-CT004	-	300	-	100	-	1.5	-	HDG
Product base number		Width W mm		Side height H mm		Thickness T mm		Finish see below

Fittings Bends, tees and crosses use the same order. Where more than one radius is offered, R is added after the thickness: CST-CT023-300-100-1.5-R300-HDG.	Other lengths Standard length is 3000 mm. Where a size is also made in another length, it is added before the finish: CST-CT004-100-50-2.0-L2500-HDG.	Earlier numbers Numbers from previous catalogues and offers (for example CST-CT004-007) remain valid and are linked to the new number.
---	---	--

CODE		FINISH	DESCRIPTION	CORROSION RESISTANCE
-HDG		Hot dip galvanized	Zinc coating applied after fabrication, EN ISO 1461. Standard finish; a number without a finish code means HDG.	●●●●● Outdoor, industrial, C4
-PG		Pre-galvanized	Sendzimir galvanized strip, EN 10346 (Z275). Clean, bright finish.	●●●●● Indoor, dry, C1 to C2
-ZM		Zinc-aluminium-magnesium (ZM) alloy coated steel	Zn + 3.5% Al + 3% Mg alloy coating to EN 10346. Up to 3× the corrosion resistance of HDG, self-healing cut edges, longer life.	●●●●● Severe outdoor, coastal, C4 to C5
-EP		HDG + epoxy / polyester powder coat	Hot dip galvanized, then powder coated. RAL colour on request.	●●●●● Coastal, chemical, C5
-SS304		Stainless steel AISI 304	Food, pharma and clean areas; pickled and passivated.	●●●●● Indoor wet areas, C3 to C4
-SS316		Stainless steel AISI 316L	Highest corrosion resistance: offshore, marine and chemical plants.	●●●●● Marine, offshore, C5
-AL		Aluminium	Light weight, non-magnetic. For ladders and selected trays.	●●●●● Indoor and outdoor, C3

How to read the size tables

Each product has one table. Find your **width** in the rows and your **side height** in the columns. The cell shows the sheet thicknesses we make in that size. Put the three values and the finish code after the base number.

A dash means the size is not standard; ask us for made-to-order sizes.

W \ H	H 50	H 75	H 100
100	1.2 / 1.5	1.5	1.5 / 2.0
150	1.5	1.5 / 2.0	1.5 / 2.0
200	1.5	2.0	—

W 150 · H 75 · T 1.5 · hot dip galvanized

CST-CT004-150-75-1.5-HDG


Cable trays

Perforated and solid trays, fittings and covers, in light, medium and heavy duty. Pick the size in the table and add the finish code.

Straight sections

Cable tray, perforated, light duty 45 sizes

CST-CT056



All dimensions in mm. Every width is made in each listed side height.

W	T	H	W	T	H	W	T	H
50	1.0	15 / 25 / 40	200	1.2	15 / 25 / 40	450	1.5	15 / 25 / 40
70	1.0	15 / 25 / 40	225	1.2	15 / 25 / 40	500	1.5	15 / 25 / 40
100	1.0	15 / 25 / 40	250	1.2	15 / 25 / 40	600	1.5	15 / 25 / 40
120	1.0	15 / 25 / 40	300	1.2	15 / 25 / 40	750	1.5	15 / 25 / 40
150	1.0	15 / 25 / 40	400	1.5	15 / 25 / 40	900	1.5	15 / 25 / 40


- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT056-120-25-1.0-HDG

Cable tray, perforated, medium duty 15 sizes

CST-CT066



All dimensions in mm. Every width is made in each listed side height.

W	T	H	W	T	H	W	T	H
50	1.0	25	200	1.2	25	450	1.5	25
70	1.0	25	225	1.2	25	500	1.5	25
100	1.0	25	250	1.2	25	600	1.5	25
120	1.0	25	300	1.2	25	750	1.5	25
150	1.0	25	400	1.5	25	900	1.5	25


- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT066-120-25-1.0-HDG

Cable tray, perforated, heavy duty 102 sizes

CST-CT004




Side height H (mm) → cells show sheet thickness T (mm)

Width W (mm)	H 40	H 50	H 60	H 75	H 100	H 125	H 150
50	–	1.0 / 1.5 / 2.0*	–	–	2.0	–	–
70	–	1.0	–	–	–	–	–
100	–	1.0 / 1.2 / 1.5 / 2.0*	1.2	1.2 / 1.5	1.0 / 1.2 / 1.5 / 2.0	–	–
120	–	1.0	1.2	1.2	1.5	–	–
150	–	1.0 / 1.5 / 2.0	1.5	1.5	1.2 / 1.5 / 2.0*	2.0	–
200	1.5	1.0 / 1.2 / 1.5 / 2.0	1.5	1.5	1.0 / 1.2 / 1.5* / 2.0	–	–
225	–	1.2	1.5	1.5	1.5	–	–
250	–	1.2	1.5	1.5	1.5	–	–
300	1.5	1.0 / 1.2 / 2.0	1.5	2.0	1.0 / 1.2 / 1.5 / 2.0*	2.0	2.0
400	1.5	1.0 / 1.2 / 1.5	1.5	2.0	1.0 / 1.2 / 1.5 / 2.0	–	–
450	–	1.5	1.5	2.0	2.0*	2.0*	2.0
500	–	1.5	2.0	2.0	2.0	–	–
600	–	1.5	2.0	2.0	2.0*	2.0	2.0
750	–	1.5	2.0	2.0	2.0	–	–
900	–	1.5	2.0	2.0	2.0	–	–

* also available in 2500 mm length (add -L2500 before the finish code).

Cable tray, perforated, reinforced, heavy duty 39 sizes

CST-CT087



All dimensions in mm. Every width is made in each listed side height.

W	T	H	W	T	H	W	T	H
100	1.0	60 / 75 / 100	250	1.2	60 / 75 / 100	600	1.5	60 / 75 / 100
120	1.0	60 / 75 / 100	300	1.2	60 / 75 / 100	750	1.5	60 / 75 / 100
150	1.0	60 / 75 / 100	400	1.2	60 / 75 / 100	900	1.5	60 / 75 / 100
200	1.0	60 / 75 / 100	450	1.2	60 / 75 / 100			
225	1.0	60 / 75 / 100	500	1.5	60 / 75 / 100			


- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT087-200-75-1.0-HDG

Cable tray, perforated, with clamping lid 29 sizes

CST-CT097



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number


CST-CT097-250-75-1.5-HDG

Side height H (mm) → cells show sheet thickness T (mm)

Width W (mm)	H 50	H 75	H 100
100	1.0	1.2	1.5
150	1.0	1.5	1.5
200	1.2	1.5	1.5
250	1.2	1.5	–
300	1.2	2.0	2.0
400	1.5	2.0	2.0
500	1.5	2.0	2.0
600	1.5	2.0	2.0
750	1.5	2.0	2.0
900	1.5	2.0	2.0

Cable tray, solid, light duty 45 sizes

CST-CT120



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number


CST-CT120-120-25-1.0-HDG

All dimensions in mm. Every width is made in each listed side height.

W	T	H	W	T	H	W	T	H
50	1.0	15 / 25 / 40	200	1.2	15 / 25 / 40	450	1.5	15 / 25 / 40
70	1.0	15 / 25 / 40	225	1.2	15 / 25 / 40	500	1.5	15 / 25 / 40
100	1.0	15 / 25 / 40	250	1.2	15 / 25 / 40	600	1.5	15 / 25 / 40
120	1.0	15 / 25 / 40	300	1.2	15 / 25 / 40	750	1.5	15 / 25 / 40
150	1.0	15 / 25 / 40	400	1.5	15 / 25 / 40	900	1.5	15 / 25 / 40

Cable tray, solid, medium duty 15 sizes

CST-CT121



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number


CST-CT121-120-25-1.0-HDG

All dimensions in mm. Every width is made in each listed side height.

W	T	H	W	T	H	W	T	H
50	1.0	25	200	1.2	25	450	1.5	25
70	1.0	25	225	1.2	25	500	1.5	25
100	1.0	25	250	1.2	25	600	1.5	25
120	1.0	25	300	1.2	25	750	1.5	25
150	1.0	25	400	1.5	25	900	1.5	25

Cable tray, solid, heavy duty 56 sizes

CST-CT007



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT007-120-75-1.2-HDG


Side height H (mm) → cells show sheet thickness T (mm)

Width W (mm)	H 50	H 60	H 75	H 100
50	1.0	–	–	–
70	1.0	–	–	–
100	1.0	1.2	1.2	1.5
120	1.0	1.2	1.2	1.5
150	1.0	1.5	1.5	1.5 / 2.5
200	1.2	1.5	1.5	1.5
225	1.2	1.5	1.5	1.5
250	1.2	1.5	1.5	1.5
300	1.2	1.5	2.0	2.0
400	1.5	1.5	2.0	2.0
450	1.5	1.5	2.0	2.0 / 2.5
500	1.5	2.0	2.0	2.0
600	1.5	2.0	2.0	2.0
750	1.5	2.0	2.0	2.0
900	1.5	2.0	2.0	2.0

Horizontal fittings

Cable tray 45° flat bend, perforated, light duty 45 sizes

CST-CT058



All dimensions in mm. Every width is made in each listed side height.

W	T	H	W	T	H	W	T	H
50	1.0	15 / 25 / 40	200	1.2	15 / 25 / 40	450	1.5	15 / 25 / 40
70	1.0	15 / 25 / 40	225	1.2	15 / 25 / 40	500	1.5	15 / 25 / 40
100	1.0	15 / 25 / 40	250	1.2	15 / 25 / 40	600	1.5	15 / 25 / 40
120	1.0	15 / 25 / 40	300	1.2	15 / 25 / 40	750	1.5	15 / 25 / 40
150	1.0	15 / 25 / 40	400	1.5	15 / 25 / 40	900	1.5	15 / 25 / 40


- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT058-120-25-1.0-HDG

Cable tray 45° flat bend, perforated, medium duty 15 sizes

CST-CT068



All dimensions in mm. Every width is made in each listed side height.

W	T	H	W	T	H	W	T	H
50	1.0	25	200	1.2	25	450	1.5	25
70	1.0	25	225	1.2	25	500	1.5	25
100	1.0	25	250	1.2	25	600	1.5	25
120	1.0	25	300	1.2	25	750	1.5	25
150	1.0	25	400	1.5	25	900	1.5	25


- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT068-120-25-1.0-HDG

Cable tray 45° flat bend, perforated 22 sizes

CST-CT012



Side height H (mm) → cells show sheet thickness T (mm)

Width W (mm)	H 50	H 100	H 125	H 150
50	1.5 / 2.0	–	–	–
100	1.2 / 1.5 / 2.0	2.0	–	–
150	1.2 / 1.5 / 2.0	2.0	2.0	–
300	2.0	2.0	–	2.0
450	–	2.0	–	2.0
600	–	2.0	–	2.0
800	2.0	–	–	–

Bend radius R 300, 450, 600 mm (radius is added to the part number where more than one is offered).


- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT012-300-100-2.0-HDG

Cable tray 45° flat bend, perforated, heavy duty 80 sizes

CST-CT013



Side height H (mm) → cells show sheet thickness T (mm)

Width W (mm)	H 40	H 50	H 60	H 75	H 100	H 150
50	1.0	1.0	–	–	2.0	–
70	1.0	1.0	–	–	–	–
100	1.0	1.0	1.2	1.2	1.5	–
120	1.0	1.0	1.2	1.2	1.5	–
150	1.0	1.0	1.5	1.5	1.5 / 2.0	–
200	1.2	1.2	1.5	1.5	1.5	–
225	1.2	1.2	1.5	1.5	1.5	–
250	1.2	1.2	1.5	1.5	1.5	–
300	1.2	1.2	1.5	2.0	2.0	2.0
400	1.5	1.5	1.5	2.0	2.0	–
450	1.5	1.5	1.5	2.0	2.0	–
500	1.5	1.5	2.0	2.0	2.0	–
600	1.5	1.5	2.0	2.0	2.0	–
750	1.5	1.5	2.0	2.0	2.0	–
900	1.5	–	2.0	2.0	2.0	–

Bend radius R 600, 900 mm (radius is added to the part number where more than one is offered).


- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT013-120-60-1.2-HDG

Cable tray 45° flat bend, perforated, reinforced, heavy duty 39 sizes

CST-CT089



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT089-200-75-1.0-HDG

All dimensions in mm. Every width is made in each listed side height.


W	T	H
100	1.0	60 / 75 / 100
120	1.0	60 / 75 / 100
150	1.0	60 / 75 / 100
200	1.0	60 / 75 / 100
225	1.0	60 / 75 / 100

W	T	H
250	1.2	60 / 75 / 100
300	1.2	60 / 75 / 100
400	1.2	60 / 75 / 100
450	1.2	60 / 75 / 100
500	1.5	60 / 75 / 100

W	T	H
600	1.5	60 / 75 / 100
750	1.5	60 / 75 / 100
900	1.5	60 / 75 / 100

Cable tray 45° flat bend, perforated, turned-in edge (KT3 profile), heavy duty 13 sizes

CST-CT079



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT079-200-40-1.0-HDG

All dimensions in mm. Every width is made in each listed side height.


W	T	H
100	1.0	40
120	1.0	40
150	1.0	40
200	1.0	40
225	1.0	40

W	T	H
250	1.2	40
300	1.2	40
400	1.2	40
450	1.2	40
500	1.5	40

W	T	H
600	1.5	40
750	1.5	40
900	1.5	40

Cable tray 90° flat bend, perforated, light duty 45 sizes

CST-CT057



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT057-120-25-1.0-HDG

All dimensions in mm. Every width is made in each listed side height.


W	T	H
50	1.0	15 / 25 / 40
70	1.0	15 / 25 / 40
100	1.0	15 / 25 / 40
120	1.0	15 / 25 / 40
150	1.0	15 / 25 / 40

W	T	H
200	1.2	15 / 25 / 40
225	1.2	15 / 25 / 40
250	1.2	15 / 25 / 40
300	1.2	15 / 25 / 40
400	1.5	15 / 25 / 40

W	T	H
450	1.5	15 / 25 / 40
500	1.5	15 / 25 / 40
600	1.5	15 / 25 / 40
750	1.5	15 / 25 / 40
900	1.5	15 / 25 / 40

Cable tray 90° flat bend, perforated, medium duty 15 sizes

CST-CT067



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT067-120-25-1.0-HDG

All dimensions in mm. Every width is made in each listed side height.


W	T	H
50	1.0	25
70	1.0	25
100	1.0	25
120	1.0	25
150	1.0	25

W	T	H
200	1.2	25
225	1.2	25
250	1.2	25
300	1.2	25
400	1.5	25

W	T	H
450	1.5	25
500	1.5	25
600	1.5	25
750	1.5	25
900	1.5	25

Cable tray 90° flat bend, perforated 50 sizes

CST-CT021



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT021-200-100-1.5-HDG


Side height H (mm) → cells show sheet thickness T (mm)

Width W (mm)	H 50	H 100	H 125	H 150
50	1.5 / 2.0	–	–	–
100	1.2 / 1.5 / 2.0	1.2 / 2.0	–	–
150	1.2 / 1.5 / 2.0	1.2 / 2.0	2.0	–
200	–	1.2 / 1.5 / 2.0	–	–
300	2.0	1.2 / 2.0	2.0	2.0
450	–	2.0	–	2.0
600	–	2.0	–	2.0
800	2.0	–	–	–
900	–	2.0	–	–

Bend radius R 50, 150, 300, 450, 600, 900 mm (radius is added to the part number where more than one is offered).

Cable tray 90° flat bend, perforated, heavy duty 84 sizes

CST-CT023



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT023-120-60-1.2-HDG


Side height H (mm) → cells show sheet thickness T (mm)

Width W (mm)	H 40	H 50	H 60	H 75	H 100	H 150
50	1.0	1.0	–	–	–	–
70	1.0	1.0	–	–	–	–
100	1.0	1.0	1.2	1.2	1.5	–
120	1.0	1.0	1.2	1.2	1.5	–
150	1.0	1.0	1.5	1.5	1.5 / 2.0 / 2.5	–
200	1.2	1.2	1.5	1.5	1.5	–
225	1.2	1.2	1.5	1.5	1.5	–
250	1.2	1.2	1.5	1.5	1.5	–
300	1.2	1.2	1.5	2.0	2.0	2.0
400	1.5	1.5	1.5	2.0	2.0	–
450	1.5	1.5	1.5	2.0	2.0 / 2.5	2.0
500	1.5	1.5	2.0	2.0	2.0	–
600	1.5	1.5	2.0	2.0	2.0	2.0
750	1.5	1.5	2.0	2.0	2.0	–
900	1.5	1.5	2.0	2.0	2.0	–

Bend radius R 300, 600, 900 mm (radius is added to the part number where more than one is offered).

Cable tray 90° flat bend, perforated, reinforced, heavy duty 39 sizes

CST-CT088



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number


CST-CT088-200-75-1.0-HDG

All dimensions in mm. Every width is made in each listed side height.

W	T	H	W	T	H	W	T	H
100	1.0	60 / 75 / 100	250	1.2	60 / 75 / 100	600	1.5	60 / 75 / 100
120	1.0	60 / 75 / 100	300	1.2	60 / 75 / 100	750	1.5	60 / 75 / 100
150	1.0	60 / 75 / 100	400	1.2	60 / 75 / 100	900	1.5	60 / 75 / 100
200	1.0	60 / 75 / 100	450	1.2	60 / 75 / 100			
225	1.0	60 / 75 / 100	500	1.5	60 / 75 / 100			

Cable tray 90° flat bend, perforated, turned-in edge (KT3 profile), heavy duty 13 sizes

CST-CT078



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number


CST-CT078-200-40-1.0-HDG

All dimensions in mm. Every width is made in each listed side height.

W	T	H	W	T	H	W	T	H
100	1.0	40	250	1.2	40	600	1.5	40
120	1.0	40	300	1.2	40	750	1.5	40
150	1.0	40	400	1.2	40	900	1.5	40
200	1.0	40	450	1.2	40			
225	1.0	40	500	1.5	40			

Cable tray 90° flat bend, perforated, with clamping lid 30 sizes

CST-CT098



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number


CST-CT098-250-75-1.5-HDG

Side height H (mm) → cells show sheet thickness T (mm)

Width W (mm)	H 50	H 75	H 100
100	1.0	1.2	1.5
150	1.0	1.5	1.5
200	1.2	1.5	1.5
250	1.2	1.5	1.5
300	1.2	2.0	2.0
400	1.5	2.0	2.0
500	1.5	2.0	2.0
600	1.5	2.0	2.0
750	1.5	2.0	2.0
900	1.5	2.0	2.0

Cable tray tee, perforated, light duty 45 sizes

CST-CT060



All dimensions in mm. Every width is made in each listed side height.

W	T	H
50	1.0	15 / 25 / 40
70	1.0	15 / 25 / 40
100	1.0	15 / 25 / 40
120	1.0	15 / 25 / 40
150	1.0	15 / 25 / 40

W	T	H
200	1.2	15 / 25 / 40
225	1.2	15 / 25 / 40
250	1.2	15 / 25 / 40
300	1.2	15 / 25 / 40
400	1.5	15 / 25 / 40

W	T	H
450	1.5	15 / 25 / 40
500	1.5	15 / 25 / 40
600	1.5	15 / 25 / 40
750	1.5	15 / 25 / 40
900	1.5	15 / 25 / 40


- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT060-120-25-1.0-HDG

Cable tray tee, perforated, medium duty 15 sizes

CST-CT069



All dimensions in mm. Every width is made in each listed side height.

W	T	H
50	1.0	25
70	1.0	25
100	1.0	25
120	1.0	25
150	1.0	25

W	T	H
200	1.2	25
225	1.2	25
250	1.2	25
300	1.2	25
400	1.5	25

W	T	H
450	1.5	25
500	1.5	25
600	1.5	25
750	1.5	25
900	1.5	25


- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT069-120-25-1.0-HDG

Cable tray tee, perforated 41 sizes

CST-CT031



Side height H (mm) → cells show sheet thickness T (mm)

Width W (mm)	H 50	H 100	H 125	H 150
50	1.5 / 2.0	–	–	–
100	1.0 / 1.2 / 1.5 / 2.0	1.2 / 2.0	–	–
150	1.0 / 1.2 / 1.5 / 2.0	1.2 / 2.0	2.0	–
200	–	1.2 / 1.5 / 2.0	–	–
300	–	1.2 / 2.0	2.0	2.0
400	–	1.2	–	–
450	–	2.0	–	2.0
600	–	2.0	–	2.0
800	2.0	–	–	–
900	–	2.0	–	–

Bend radius R 300, 450, 600, 900 mm (radius is added to the part number where more than one is offered).


- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT031-200-100-1.5-HDG

Cable tray tee, perforated, heavy duty 92 sizes

CST-CT033



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number


CST-CT033-300-50-1.2-HDG

Part No.	W1 × W2	H	T	R	Part No.	W1 × W2	H	T	R
CST-CT033-150-100-2.0-R600	150	100	2.0	600	CST-CT033-300-50-1.2	300	50	1.2	-
CST-CT033-150-100-2.0-R900	150	100	2.0	900	CST-CT033-400-50-1.5	400	50	1.5	-
CST-CT033-150-100-2.5-R300	150	100	2.5	300	CST-CT033-450-50-1.5	450	50	1.5	-
CST-CT033-300-100-2.0-R600	300	100	2.0	600	CST-CT033-500-50-1.5	500	50	1.5	-
CST-CT033-300-100-2.0-R900	300	100	2.0	900	CST-CT033-600-50-1.5	600	50	1.5	-
CST-CT033-450-100-2.0-R600	450	100	2.0	600	CST-CT033-750-50-1.5	750	50	1.5	-
CST-CT033-450-100-2.0-R900	450	100	2.0	900	CST-CT033-900-50-1.5	900	50	1.5	-
CST-CT033-450-100-2.5-R300	450	100	2.5	300	CST-CT033-100-60-1.2	100	60	1.2	-
CST-CT033-450X300-100-2.0-R600	450 × 300	100	2.0	600	CST-CT033-120-60-1.2	120	60	1.2	-
CST-CT033-450X300-100-2.0-R900	450 × 300	100	2.0	900	CST-CT033-150-60-1.5	150	60	1.5	-
CST-CT033-600-100-2.0-R600	600	100	2.0	600	CST-CT033-200-60-1.5	200	60	1.5	-
CST-CT033-600-100-2.0-R900	600	100	2.0	900	CST-CT033-225-60-1.5	225	60	1.5	-
CST-CT033-600-150-2.0-R600	600	150	2.0	600	CST-CT033-250-60-1.5	250	60	1.5	-
CST-CT033-600X150-100-2.0-R600	600 × 150	100	2.0	600	CST-CT033-300-60-1.5	300	60	1.5	-
CST-CT033-600X150-100-2.0-R900	600 × 150	100	2.0	900	CST-CT033-400-60-1.5	400	60	1.5	-
CST-CT033-600X300-100-2.0-R600	600 × 300	100	2.0	600	CST-CT033-450-60-1.5	450	60	1.5	-
CST-CT033-600X300-100-2.0-R900	600 × 300	100	2.0	900	CST-CT033-500-60-2.0	500	60	2.0	-
CST-CT033-600X450-100-2.0-R600	600 × 450	100	2.0	600	CST-CT033-600-60-2.0	600	60	2.0	-
CST-CT033-600X450-100-2.0-R900	600 × 450	100	2.0	900	CST-CT033-750-60-2.0	750	60	2.0	-
CST-CT033-900-100-2.0-R600	900	100	2.0	600	CST-CT033-900-60-2.0	900	60	2.0	-
CST-CT033-900-100-2.0-R900	900	100	2.0	900	CST-CT033-100-75-1.2	100	75	1.2	-
CST-CT033-900X600-100-2.0-R600	900 × 600	100	2.0	600	CST-CT033-120-75-1.2	120	75	1.2	-
CST-CT033-900X600-100-2.0-R900	900 × 600	100	2.0	900	CST-CT033-150-75-1.5	150	75	1.5	-
CST-CT033-50-40-1.0	50	40	1.0	-	CST-CT033-200-75-1.5	200	75	1.5	-
CST-CT033-70-40-1.0	70	40	1.0	-	CST-CT033-225-75-1.5	225	75	1.5	-
CST-CT033-100-40-1.0	100	40	1.0	-	CST-CT033-250-75-1.5	250	75	1.5	-
CST-CT033-120-40-1.0	120	40	1.0	-	CST-CT033-300-75-2.0	300	75	2.0	-
CST-CT033-150-40-1.0	150	40	1.0	-	CST-CT033-400-75-2.0	400	75	2.0	-
CST-CT033-200-40-1.2	200	40	1.2	-	CST-CT033-450-75-2.0	450	75	2.0	-
CST-CT033-225-40-1.2	225	40	1.2	-	CST-CT033-500-75-2.0	500	75	2.0	-
CST-CT033-250-40-1.2	250	40	1.2	-	CST-CT033-600-75-2.0	600	75	2.0	-
CST-CT033-300-40-1.2	300	40	1.2	-	CST-CT033-750-75-2.0	750	75	2.0	-
CST-CT033-400-40-1.5	400	40	1.5	-	CST-CT033-900-75-2.0	900	75	2.0	-
CST-CT033-450-40-1.5	450	40	1.5	-	CST-CT033-100-100-1.5	100	100	1.5	-
CST-CT033-500-40-1.5	500	40	1.5	-	CST-CT033-120-100-1.5	120	100	1.5	-
CST-CT033-600-40-1.5	600	40	1.5	-	CST-CT033-150-100-1.5	150	100	1.5	-
CST-CT033-750-40-1.5	750	40	1.5	-	CST-CT033-200-100-1.5	200	100	1.5	-
CST-CT033-900-40-1.5	900	40	1.5	-	CST-CT033-225-100-1.5	225	100	1.5	-
CST-CT033-50-50-1.0	50	50	1.0	-	CST-CT033-250-100-1.5	250	100	1.5	-
CST-CT033-70-50-1.0	70	50	1.0	-	CST-CT033-300-100-2.0	300	100	2.0	-
CST-CT033-100-50-1.0	100	50	1.0	-	CST-CT033-400-100-2.0	400	100	2.0	-
CST-CT033-120-50-1.0	120	50	1.0	-	CST-CT033-450-100-2.0	450	100	2.0	-
CST-CT033-150-50-1.0	150	50	1.0	-	CST-CT033-500-100-2.0	500	100	2.0	-
CST-CT033-200-50-1.2	200	50	1.2	-	CST-CT033-600-100-2.0	600	100	2.0	-
CST-CT033-225-50-1.2	225	50	1.2	-	CST-CT033-750-100-2.0	750	100	2.0	-
CST-CT033-250-50-1.2	250	50	1.2	-	CST-CT033-900-100-2.0	900	100	2.0	-

Dimensions in mm: W width, H height, T thickness, R radius.

Cable tray tee, perforated, reinforced, heavy duty 39 sizes

CST-CT090



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number


CST-CT090-200-75-1.0-HDG

All dimensions in mm. Every width is made in each listed side height.

W	T	H	W	T	H	W	T	H
100	1.0	60 / 75 / 100	250	1.2	60 / 75 / 100	600	1.5	60 / 75 / 100
120	1.0	60 / 75 / 100	300	1.2	60 / 75 / 100	750	1.5	60 / 75 / 100
150	1.0	60 / 75 / 100	400	1.2	60 / 75 / 100	900	1.5	60 / 75 / 100
200	1.0	60 / 75 / 100	450	1.2	60 / 75 / 100			
225	1.0	60 / 75 / 100	500	1.5	60 / 75 / 100			

Cable tray tee, perforated, turned-in edge (KT3 profile), heavy duty 13 sizes

CST-CT080



All dimensions in mm. Every width is made in each listed side height.

W	T	H	W	T	H	W	T	H
100	1.0	40	250	1.2	40	600	1.5	40
120	1.0	40	300	1.2	40	750	1.5	40
150	1.0	40	400	1.2	40	900	1.5	40
200	1.0	40	450	1.2	40			
225	1.0	40	500	1.5	40			


- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT080-200-40-1.0-HDG

Cable tray tee, perforated, with clamping lid 21 sizes

CST-CT099



Side height H (mm) → cells show sheet thickness T (mm)

Width W (mm)	H 50	H 75
100	1.0	1.2 / 1.5
150	1.0	1.5
200	1.2	1.5
250	1.2	1.5
300	1.2	2.0
400	1.5	2.0
500	1.5	2.0
600	1.5	2.0
750	1.5	2.0
900	1.5	2.0


- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT099-250-75-1.5-HDG

Cable tray cross, perforated, light duty 45 sizes

CST-CT059



All dimensions in mm. Every width is made in each listed side height.

W	T	H	W	T	H	W	T	H
50	1.0	15 / 25 / 40	200	1.2	15 / 25 / 40	450	1.5	15 / 25 / 40
70	1.0	15 / 25 / 40	225	1.2	15 / 25 / 40	500	1.5	15 / 25 / 40
100	1.0	15 / 25 / 40	250	1.2	15 / 25 / 40	600	1.5	15 / 25 / 40
120	1.0	15 / 25 / 40	300	1.2	15 / 25 / 40	750	1.5	15 / 25 / 40
150	1.0	15 / 25 / 40	400	1.5	15 / 25 / 40	900	1.5	15 / 25 / 40


- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT059-120-25-1.0-HDG

Cable tray cross, perforated 16 sizes

CST-CT036



Side height H (mm) → cells show sheet thickness T (mm)

Width W (mm)	H 50	H 100	H 125	H 150
50	1.5	–	–	–
100	1.2 / 1.5	–	–	–
150	1.2 / 1.5	2.0	–	–
300	–	2.0	–	–
450	–	2.0	–	2.0
600	–	2.0	2.0	2.0
800	2.0	–	–	–

- Hot dip galvanized to EN ISO 1461 as standard; all finishes available


Example part number

CST-CT036-300-100-2.0-HDG

Bend radius R 300, 600, 900 mm (radius is added to the part number where more than one is offered).

Cable tray cross, perforated, heavy duty 83 sizes

CST-CT037



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT037-120-60-1.2-HDG


Side height H (mm) → cells show sheet thickness T (mm)

Width W (mm)	H 40	H 50	H 60	H 75	H 100	H 150
50	1.0	1.0	–	–	2.0	–
70	1.0	1.0	–	–	–	–
100	1.0	1.0	1.2	1.2	1.5	–
120	1.0	1.0	1.2	1.2	1.5	–
150	1.0	1.0	1.5	1.5	1.5 / 2.0 / 2.5	–
200	1.2	1.2	1.5	1.5	1.5	–
225	1.2	1.2	1.5	1.5	1.5	–
250	1.2	1.2	1.5	1.5	1.5	–
300	1.2	1.2	1.5	2.0	2.0	–
400	1.5	1.5	1.5	2.0	2.0	–
450	1.5	1.5	1.5	2.0	2.0 / 2.5	–
500	1.5	1.5	2.0	2.0	2.0	–
600	1.5	1.5	2.0	2.0	2.0	2.0
750	1.5	1.5	2.0	2.0	2.0	–
900	1.5	1.5	2.0	2.0	2.0	–

Bend radius R 300, 600, 900 mm (radius is added to the part number where more than one is offered).

Cable tray cross, perforated, reinforced, heavy duty 39 sizes

CST-CT091



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number


CST-CT091-200-75-1.0-HDG

All dimensions in mm. Every width is made in each listed side height.

W	T	H	W	T	H	W	T	H
100	1.0	60 / 75 / 100	250	1.2	60 / 75 / 100	600	1.5	60 / 75 / 100
120	1.0	60 / 75 / 100	300	1.2	60 / 75 / 100	750	1.5	60 / 75 / 100
150	1.0	60 / 75 / 100	400	1.2	60 / 75 / 100	900	1.5	60 / 75 / 100
200	1.0	60 / 75 / 100	450	1.2	60 / 75 / 100			
225	1.0	60 / 75 / 100	500	1.5	60 / 75 / 100			

Cable tray cross, perforated, turned-in edge (KT3 profile), heavy duty 13 sizes

CST-CT081



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number


CST-CT081-200-40-1.0-HDG

All dimensions in mm. Every width is made in each listed side height.

W	T	H	W	T	H	W	T	H
100	1.0	40	250	1.2	40	600	1.5	40
120	1.0	40	300	1.2	40	750	1.5	40
150	1.0	40	400	1.2	40	900	1.5	40
200	1.0	40	450	1.2	40			
225	1.0	40	500	1.5	40			

Cable tray cross, perforated, with clamping lid 30 sizes

CST-CT100



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number


CST-CT100-250-75-1.5-HDG

Side height H (mm) → cells show sheet thickness T (mm)

Width W (mm)	H 50	H 75	H 100
100	1.0	1.2	1.5
150	1.0	1.5	1.5
200	1.2	1.5	1.5
250	1.2	1.5	1.5
300	1.2	2.0	2.0
400	1.5	2.0	2.0
500	1.5	2.0	2.0
600	1.5	2.0	2.0
750	1.5	2.0	2.0
900	1.5	2.0	2.0

Cable tray reducer, straight, perforated, light duty 21 sizes

CST-CT065



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT065-100X500-25-1.5-HDG


Part No.	W1 × W2	H	T
CST-CT065-100X200-15-1.5	100 × 200	15	1.5
CST-CT065-100X300-15-1.5	100 × 300	15	1.5
CST-CT065-100X400-15-1.5	100 × 400	15	1.5
CST-CT065-100X500-15-1.5	100 × 500	15	1.5
CST-CT065-100X600-15-1.5	100 × 600	15	1.5
CST-CT065-100X750-15-1.5	100 × 750	15	1.5
CST-CT065-100X900-15-1.5	100 × 900	15	1.5
CST-CT065-100X200-25-1.5	100 × 200	25	1.5
CST-CT065-100X300-25-1.5	100 × 300	25	1.5
CST-CT065-100X400-25-1.5	100 × 400	25	1.5
CST-CT065-100X500-25-1.5	100 × 500	25	1.5

Dimensions in mm: W width, H height, T thickness.

Part No.	W1 × W2	H	T
CST-CT065-100X600-25-1.5	100 × 600	25	1.5
CST-CT065-100X750-25-1.5	100 × 750	25	1.5
CST-CT065-100X900-25-1.5	100 × 900	25	1.5
CST-CT065-100X200-40-1.5	100 × 200	40	1.5
CST-CT065-100X300-40-1.5	100 × 300	40	1.5
CST-CT065-100X400-40-1.5	100 × 400	40	1.5
CST-CT065-100X500-40-1.5	100 × 500	40	1.5
CST-CT065-100X600-40-1.5	100 × 600	40	1.5
CST-CT065-100X750-40-1.5	100 × 750	40	1.5
CST-CT065-100X900-40-1.5	100 × 900	40	1.5

Cable tray reducer, straight, perforated, medium duty 7 sizes

CST-CT072



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number


CST-CT072-100X500-25-1.5-HDG

Part No.	W1 × W2	H	T
CST-CT072-100X200-25-1.5	100 × 200	25	1.5
CST-CT072-100X300-25-1.5	100 × 300	25	1.5
CST-CT072-100X400-25-1.5	100 × 400	25	1.5
CST-CT072-100X500-25-1.5	100 × 500	25	1.5
CST-CT072-100X600-25-1.5	100 × 600	25	1.5
CST-CT072-100X750-25-1.5	100 × 750	25	1.5
CST-CT072-100X900-25-1.5	100 × 900	25	1.5

Dimensions in mm: W width, H height, T thickness.

Cable tray reducer, straight, perforated, heavy duty 41 sizes

CST-CT039



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number


CST-CT039-100X200-60-1.5-HDG

Part No.	W1 × W2	H	T
CST-CT039-300X150-100-2.0	300 × 150	100	2.0
CST-CT039-450X150-100-2.0	450 × 150	100	2.0
CST-CT039-600X300-100-2.0	600 × 300	100	2.0
CST-CT039-600X450-100-2.0	600 × 450	100	2.0
CST-CT039-900X450-100-2.0	900 × 450	100	2.0
CST-CT039-900X600-100-2.0	900 × 600	100	2.0
CST-CT039-100X200-40-1.5	100 × 200	40	1.5
CST-CT039-100X300-40-1.5	100 × 300	40	1.5
CST-CT039-100X400-40-1.5	100 × 400	40	1.5
CST-CT039-100X500-40-1.5	100 × 500	40	1.5
CST-CT039-100X600-40-1.5	100 × 600	40	1.5
CST-CT039-100X750-40-1.5	100 × 750	40	1.5
CST-CT039-100X900-40-1.5	100 × 900	40	1.5
CST-CT039-100X200-50-1.5	100 × 200	50	1.5
CST-CT039-100X300-50-1.5	100 × 300	50	1.5
CST-CT039-100X400-50-1.5	100 × 400	50	1.5
CST-CT039-100X500-50-1.5	100 × 500	50	1.5
CST-CT039-100X600-50-1.5	100 × 600	50	1.5
CST-CT039-100X750-50-1.5	100 × 750	50	1.5
CST-CT039-100X900-50-1.5	100 × 900	50	1.5
CST-CT039-100X200-60-1.5	100 × 200	60	1.5
CST-CT039-100X300-60-1.5	100 × 300	60	1.5
CST-CT039-100X400-60-1.5	100 × 400	60	1.5
CST-CT039-100X500-60-1.5	100 × 500	60	1.5
CST-CT039-100X600-60-1.5	100 × 600	60	1.5
CST-CT039-100X750-60-1.5	100 × 750	60	1.5
CST-CT039-100X900-60-1.5	100 × 900	60	1.5
CST-CT039-100X200-75-1.5	100 × 200	75	1.5

Dimensions in mm: W width, H height, T thickness.

Cable tray reducer, straight, perforated, reinforced, heavy duty 21 sizes

CST-CT094



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number


CST-CT094-100X500-75-1.5-HDG

Part No.	W1 × W2	H	T
CST-CT094-100X200-60-1.5	100 × 200	60	1.5
CST-CT094-100X300-60-1.5	100 × 300	60	1.5
CST-CT094-100X400-60-1.5	100 × 400	60	1.5
CST-CT094-100X500-60-1.5	100 × 500	60	1.5
CST-CT094-100X600-60-1.5	100 × 600	60	1.5
CST-CT094-100X750-60-1.5	100 × 750	60	1.5
CST-CT094-100X900-60-1.5	100 × 900	60	1.5
CST-CT094-100X200-75-1.5	100 × 200	75	1.5
CST-CT094-100X300-75-1.5	100 × 300	75	1.5
CST-CT094-100X400-75-1.5	100 × 400	75	1.5
CST-CT094-100X500-75-1.5	100 × 500	75	1.5

Dimensions in mm: W width, H height, T thickness.

Cable tray reducer, straight, perforated, turned-in edge (KT3 profile), heavy duty 7 sizes

CST-CT084



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number


CST-CT084-100X500-40-1.5-HDG

Part No.	W1 × W2	H	T
CST-CT084-100X200-40-1.5	100 × 200	40	1.5
CST-CT084-100X300-40-1.5	100 × 300	40	1.5
CST-CT084-100X400-40-1.5	100 × 400	40	1.5
CST-CT084-100X500-40-1.5	100 × 500	40	1.5
CST-CT084-100X600-40-1.5	100 × 600	40	1.5
CST-CT084-100X750-40-1.5	100 × 750	40	1.5
CST-CT084-100X900-40-1.5	100 × 900	40	1.5

Dimensions in mm: W width, H height, T thickness.

Cable tray reducer, straight, perforated, with clamping lid 21 sizes

CST-CT103



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number


CST-CT103-100X500-75-1.5-HDG

Part No.	W1 × W2	H	T	Part No.	W1 × W2	H	T
CST-CT103-100X200-50-1.5	100 × 200	50	1.5	CST-CT103-100X600-75-1.5	100 × 600	75	1.5
CST-CT103-100X300-50-1.5	100 × 300	50	1.5	CST-CT103-100X750-75-1.5	100 × 750	75	1.5
CST-CT103-100X400-50-1.5	100 × 400	50	1.5	CST-CT103-100X900-75-1.5	100 × 900	75	1.5
CST-CT103-100X500-50-1.5	100 × 500	50	1.5	CST-CT103-100X200-100-1.5	100 × 200	100	1.5
CST-CT103-100X600-50-1.5	100 × 600	50	1.5	CST-CT103-100X300-100-1.5	100 × 300	100	1.5
CST-CT103-100X750-50-1.5	100 × 750	50	1.5	CST-CT103-100X400-100-1.5	100 × 400	100	1.5
CST-CT103-100X900-50-1.5	100 × 900	50	1.5	CST-CT103-100X500-100-1.5	100 × 500	100	1.5
CST-CT103-100X200-75-1.5	100 × 200	75	1.5	CST-CT103-100X600-100-1.5	100 × 600	100	1.5
CST-CT103-100X300-75-1.5	100 × 300	75	1.5	CST-CT103-100X750-100-1.5	100 × 750	100	1.5
CST-CT103-100X400-75-1.5	100 × 400	75	1.5	CST-CT103-100X900-100-1.5	100 × 900	100	1.5
CST-CT103-100X500-75-1.5	100 × 500	75	1.5				

Dimensions in mm: W width, H height, T thickness.

Cable tray reducer, left, perforated, light duty 21 sizes

CST-CT064



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number


CST-CT064-100X500-25-1.5-HDG

Part No.	W1 × W2	H	T	Part No.	W1 × W2	H	T
CST-CT064-100X200-15-1.5	100 × 200	15	1.5	CST-CT064-100X600-25-1.5	100 × 600	25	1.5
CST-CT064-100X300-15-1.5	100 × 300	15	1.5	CST-CT064-100X750-25-1.5	100 × 750	25	1.5
CST-CT064-100X400-15-1.5	100 × 400	15	1.5	CST-CT064-100X900-25-1.5	100 × 900	25	1.5
CST-CT064-100X500-15-1.5	100 × 500	15	1.5	CST-CT064-100X200-40-1.5	100 × 200	40	1.5
CST-CT064-100X600-15-1.5	100 × 600	15	1.5	CST-CT064-100X300-40-1.5	100 × 300	40	1.5
CST-CT064-100X750-15-1.5	100 × 750	15	1.5	CST-CT064-100X400-40-1.5	100 × 400	40	1.5
CST-CT064-100X900-15-1.5	100 × 900	15	1.5	CST-CT064-100X500-40-1.5	100 × 500	40	1.5
CST-CT064-100X200-25-1.5	100 × 200	25	1.5	CST-CT064-100X600-40-1.5	100 × 600	40	1.5
CST-CT064-100X300-25-1.5	100 × 300	25	1.5	CST-CT064-100X750-40-1.5	100 × 750	40	1.5
CST-CT064-100X400-25-1.5	100 × 400	25	1.5	CST-CT064-100X900-40-1.5	100 × 900	40	1.5
CST-CT064-100X500-25-1.5	100 × 500	25	1.5				

Dimensions in mm: W width, H height, T thickness.

Cable tray reducer, left, perforated, medium duty 7 sizes

CST-CT073



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number


CST-CT073-100X500-25-1.5-HDG

Part No.	W1 × W2	H	T
CST-CT073-100X200-25-1.5	100 × 200	25	1.5
CST-CT073-100X300-25-1.5	100 × 300	25	1.5
CST-CT073-100X400-25-1.5	100 × 400	25	1.5
CST-CT073-100X500-25-1.5	100 × 500	25	1.5
CST-CT073-100X600-25-1.5	100 × 600	25	1.5
CST-CT073-100X750-25-1.5	100 × 750	25	1.5
CST-CT073-100X900-25-1.5	100 × 900	25	1.5

Dimensions in mm: W width, H height, T thickness.

Cable tray reducer, left, perforated, heavy duty 35 sizes

CST-CT077



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT077-100X500-60-1.5-HDG


Part No.	W1 × W2	H	T
CST-CT077-100X200-40-1.5	100 × 200	40	1.5
CST-CT077-100X300-40-1.5	100 × 300	40	1.5
CST-CT077-100X400-40-1.5	100 × 400	40	1.5
CST-CT077-100X500-40-1.5	100 × 500	40	1.5
CST-CT077-100X600-40-1.5	100 × 600	40	1.5
CST-CT077-100X750-40-1.5	100 × 750	40	1.5
CST-CT077-100X900-40-1.5	100 × 900	40	1.5
CST-CT077-100X200-50-1.5	100 × 200	50	1.5
CST-CT077-100X300-50-1.5	100 × 300	50	1.5
CST-CT077-100X400-50-1.5	100 × 400	50	1.5
CST-CT077-100X500-50-1.5	100 × 500	50	1.5
CST-CT077-100X600-50-1.5	100 × 600	50	1.5
CST-CT077-100X750-50-1.5	100 × 750	50	1.5
CST-CT077-100X900-50-1.5	100 × 900	50	1.5
CST-CT077-100X200-60-1.5	100 × 200	60	1.5
CST-CT077-100X300-60-1.5	100 × 300	60	1.5
CST-CT077-100X400-60-1.5	100 × 400	60	1.5
CST-CT077-100X500-60-1.5	100 × 500	60	1.5

Dimensions in mm: W width, H height, T thickness.

Part No.	W1 × W2	H	T
CST-CT077-100X600-60-1.5	100 × 600	60	1.5
CST-CT077-100X750-60-1.5	100 × 750	60	1.5
CST-CT077-100X900-60-1.5	100 × 900	60	1.5
CST-CT077-100X200-75-1.5	100 × 200	75	1.5
CST-CT077-100X300-75-1.5	100 × 300	75	1.5
CST-CT077-100X400-75-1.5	100 × 400	75	1.5
CST-CT077-100X500-75-1.5	100 × 500	75	1.5
CST-CT077-100X600-75-1.5	100 × 600	75	1.5
CST-CT077-100X750-75-1.5	100 × 750	75	1.5
CST-CT077-100X900-75-1.5	100 × 900	75	1.5
CST-CT077-100X200-100-1.5	100 × 200	100	1.5
CST-CT077-100X300-100-1.5	100 × 300	100	1.5
CST-CT077-100X400-100-1.5	100 × 400	100	1.5
CST-CT077-100X500-100-1.5	100 × 500	100	1.5
CST-CT077-100X600-100-1.5	100 × 600	100	1.5
CST-CT077-100X750-100-1.5	100 × 750	100	1.5
CST-CT077-100X900-100-1.5	100 × 900	100	1.5

Cable tray reducer, left, perforated, reinforced, heavy duty 21 sizes

CST-CT096



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT096-100X500-75-1.5-HDG


Part No.	W1 × W2	H	T
CST-CT096-100X200-60-1.5	100 × 200	60	1.5
CST-CT096-100X300-60-1.5	100 × 300	60	1.5
CST-CT096-100X400-60-1.5	100 × 400	60	1.5
CST-CT096-100X500-60-1.5	100 × 500	60	1.5
CST-CT096-100X600-60-1.5	100 × 600	60	1.5
CST-CT096-100X750-60-1.5	100 × 750	60	1.5
CST-CT096-100X900-60-1.5	100 × 900	60	1.5
CST-CT096-100X200-75-1.5	100 × 200	75	1.5
CST-CT096-100X300-75-1.5	100 × 300	75	1.5
CST-CT096-100X400-75-1.5	100 × 400	75	1.5
CST-CT096-100X500-75-1.5	100 × 500	75	1.5

Dimensions in mm: W width, H height, T thickness.

Part No.	W1 × W2	H	T
CST-CT096-100X600-75-1.5	100 × 600	75	1.5
CST-CT096-100X750-75-1.5	100 × 750	75	1.5
CST-CT096-100X900-75-1.5	100 × 900	75	1.5
CST-CT096-100X200-100-1.5	100 × 200	100	1.5
CST-CT096-100X300-100-1.5	100 × 300	100	1.5
CST-CT096-100X400-100-1.5	100 × 400	100	1.5
CST-CT096-100X500-100-1.5	100 × 500	100	1.5
CST-CT096-100X600-100-1.5	100 × 600	100	1.5
CST-CT096-100X750-100-1.5	100 × 750	100	1.5
CST-CT096-100X900-100-1.5	100 × 900	100	1.5

Cable tray reducer, left, perforated, turned-in edge (KT3 profile), heavy duty 7 sizes

CST-CT085



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number


CST-CT085-100X500-40-1.5-HDG

Part No.	W1 × W2	H	T
CST-CT085-100X200-40-1.5	100 × 200	40	1.5
CST-CT085-100X300-40-1.5	100 × 300	40	1.5
CST-CT085-100X400-40-1.5	100 × 400	40	1.5
CST-CT085-100X500-40-1.5	100 × 500	40	1.5
CST-CT085-100X600-40-1.5	100 × 600	40	1.5
CST-CT085-100X750-40-1.5	100 × 750	40	1.5
CST-CT085-100X900-40-1.5	100 × 900	40	1.5

Dimensions in mm: W width, H height, T thickness.

Cable tray reducer, left, perforated, with clamping lid 21 sizes

CST-CT104



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT104-100X500-75-1.5-HDG


Part No.	W1 × W2	H	T
CST-CT104-100X200-50-1.5	100 × 200	50	1.5
CST-CT104-100X300-50-1.5	100 × 300	50	1.5
CST-CT104-100X400-50-1.5	100 × 400	50	1.5
CST-CT104-100X500-50-1.5	100 × 500	50	1.5
CST-CT104-100X600-50-1.5	100 × 600	50	1.5
CST-CT104-100X750-50-1.5	100 × 750	50	1.5
CST-CT104-100X900-50-1.5	100 × 900	50	1.5
CST-CT104-100X200-75-1.5	100 × 200	75	1.5
CST-CT104-100X300-75-1.5	100 × 300	75	1.5
CST-CT104-100X400-75-1.5	100 × 400	75	1.5
CST-CT104-100X500-75-1.5	100 × 500	75	1.5

Dimensions in mm: W width, H height, T thickness.

Part No.	W1 × W2	H	T
CST-CT104-100X600-75-1.5	100 × 600	75	1.5
CST-CT104-100X750-75-1.5	100 × 750	75	1.5
CST-CT104-100X900-75-1.5	100 × 900	75	1.5
CST-CT104-100X200-100-1.5	100 × 200	100	1.5
CST-CT104-100X300-100-1.5	100 × 300	100	1.5
CST-CT104-100X400-100-1.5	100 × 400	100	1.5
CST-CT104-100X500-100-1.5	100 × 500	100	1.5
CST-CT104-100X600-100-1.5	100 × 600	100	1.5
CST-CT104-100X750-100-1.5	100 × 750	100	1.5
CST-CT104-100X900-100-1.5	100 × 900	100	1.5

Cable tray reducer, right, perforated, light duty 7 sizes

CST-CT063



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number


CST-CT063-100X500-15-1.5-HDG

Part No.	W1 × W2	H	T
CST-CT063-100X200-15-1.5	100 × 200	15	1.5
CST-CT063-100X300-15-1.5	100 × 300	15	1.5
CST-CT063-100X400-15-1.5	100 × 400	15	1.5
CST-CT063-100X500-15-1.5	100 × 500	15	1.5
CST-CT063-100X600-15-1.5	100 × 600	15	1.5
CST-CT063-100X750-15-1.5	100 × 750	15	1.5
CST-CT063-100X900-15-1.5	100 × 900	15	1.5

Dimensions in mm: W width, H height, T thickness.

Cable tray reducer, right, perforated, medium duty 7 sizes

CST-CT074



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number


CST-CT074-100X500-25-1.5-HDG

Part No.	W1 × W2	H	T
CST-CT074-100X200-25-1.5	100 × 200	25	1.5
CST-CT074-100X300-25-1.5	100 × 300	25	1.5
CST-CT074-100X400-25-1.5	100 × 400	25	1.5
CST-CT074-100X500-25-1.5	100 × 500	25	1.5
CST-CT074-100X600-25-1.5	100 × 600	25	1.5
CST-CT074-100X750-25-1.5	100 × 750	25	1.5
CST-CT074-100X900-25-1.5	100 × 900	25	1.5

Dimensions in mm: W width, H height, T thickness.

Cable tray reducer, right, perforated, heavy duty 41 sizes

CST-CT038



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number


CST-CT038-100X200-60-1.5-HDG

Part No.	W1 × W2	H	T	Part No.	W1 × W2	H	T	Part No.	W1 × W2	H	T
CST-CT038-300X150-100-2.0	300 × 150	100	2.0	CST-CT038-100X300-50-1.5	100 × 300	50	1.5	CST-CT038-100X300-75-1.5	100 × 300	75	1.5
CST-CT038-450X150-100-2.0	450 × 150	100	2.0	CST-CT038-100X400-50-1.5	100 × 400	50	1.5	CST-CT038-100X400-75-1.5	100 × 400	75	1.5
CST-CT038-600X300-100-2.0	600 × 300	100	2.0	CST-CT038-100X500-50-1.5	100 × 500	50	1.5	CST-CT038-100X500-75-1.5	100 × 500	75	1.5
CST-CT038-600X450-100-2.0	600 × 450	100	2.0	CST-CT038-100X600-50-1.5	100 × 600	50	1.5	CST-CT038-100X600-75-1.5	100 × 600	75	1.5
CST-CT038-900X450-100-2.0	900 × 450	100	2.0	CST-CT038-100X750-50-1.5	100 × 750	50	1.5	CST-CT038-100X750-75-1.5	100 × 750	75	1.5
CST-CT038-900X600-100-2.0	900 × 600	100	2.0	CST-CT038-100X900-50-1.5	100 × 900	50	1.5	CST-CT038-100X900-75-1.5	100 × 900	75	1.5
CST-CT038-100X200-40-1.5	100 × 200	40	1.5	CST-CT038-100X200-60-1.5	100 × 200	60	1.5	CST-CT038-100X200-100-1.5	100 × 200	100	1.5
CST-CT038-100X300-40-1.5	100 × 300	40	1.5	CST-CT038-100X300-60-1.5	100 × 300	60	1.5	CST-CT038-100X300-100-1.5	100 × 300	100	1.5
CST-CT038-100X400-40-1.5	100 × 400	40	1.5	CST-CT038-100X400-60-1.5	100 × 400	60	1.5	CST-CT038-100X400-100-1.5	100 × 400	100	1.5
CST-CT038-100X500-40-1.5	100 × 500	40	1.5	CST-CT038-100X500-60-1.5	100 × 500	60	1.5	CST-CT038-100X500-100-1.5	100 × 500	100	1.5
CST-CT038-100X600-40-1.5	100 × 600	40	1.5	CST-CT038-100X600-60-1.5	100 × 600	60	1.5	CST-CT038-100X600-100-1.5	100 × 600	100	1.5
CST-CT038-100X750-40-1.5	100 × 750	40	1.5	CST-CT038-100X750-60-1.5	100 × 750	60	1.5	CST-CT038-100X750-100-1.5	100 × 750	100	1.5
CST-CT038-100X900-40-1.5	100 × 900	40	1.5	CST-CT038-100X900-60-1.5	100 × 900	60	1.5	CST-CT038-100X900-100-1.5	100 × 900	100	1.5
CST-CT038-100X200-50-1.5	100 × 200	50	1.5	CST-CT038-100X200-75-1.5	100 × 200	75	1.5				

Dimensions in mm: W width, H height, T thickness.

Cable tray reducer, right, perforated, reinforced, heavy duty 21 sizes

CST-CT095



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number


CST-CT095-100X500-75-1.5-HDG

Part No.	W1 × W2	H	T	Part No.	W1 × W2	H	T
CST-CT095-100X200-60-1.5	100 × 200	60	1.5	CST-CT095-100X600-75-1.5	100 × 600	75	1.5
CST-CT095-100X300-60-1.5	100 × 300	60	1.5	CST-CT095-100X750-75-1.5	100 × 750	75	1.5
CST-CT095-100X400-60-1.5	100 × 400	60	1.5	CST-CT095-100X900-75-1.5	100 × 900	75	1.5
CST-CT095-100X500-60-1.5	100 × 500	60	1.5	CST-CT095-100X200-100-1.5	100 × 200	100	1.5
CST-CT095-100X600-60-1.5	100 × 600	60	1.5	CST-CT095-100X300-100-1.5	100 × 300	100	1.5
CST-CT095-100X750-60-1.5	100 × 750	60	1.5	CST-CT095-100X400-100-1.5	100 × 400	100	1.5
CST-CT095-100X900-60-1.5	100 × 900	60	1.5	CST-CT095-100X500-100-1.5	100 × 500	100	1.5
CST-CT095-100X200-75-1.5	100 × 200	75	1.5	CST-CT095-100X600-100-1.5	100 × 600	100	1.5
CST-CT095-100X300-75-1.5	100 × 300	75	1.5	CST-CT095-100X750-100-1.5	100 × 750	100	1.5
CST-CT095-100X400-75-1.5	100 × 400	75	1.5	CST-CT095-100X900-100-1.5	100 × 900	100	1.5
CST-CT095-100X500-75-1.5	100 × 500	75	1.5				

Dimensions in mm: W width, H height, T thickness.

Cable tray reducer, right, perforated, turned-in edge (KT3 profile), heavy duty 7 sizes

CST-CT086



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number


CST-CT086-100X500-40-1.5-HDG

Part No.	W1 × W2	H	T
CST-CT086-100X200-40-1.5	100 × 200	40	1.5
CST-CT086-100X300-40-1.5	100 × 300	40	1.5
CST-CT086-100X400-40-1.5	100 × 400	40	1.5
CST-CT086-100X500-40-1.5	100 × 500	40	1.5
CST-CT086-100X600-40-1.5	100 × 600	40	1.5
CST-CT086-100X750-40-1.5	100 × 750	40	1.5
CST-CT086-100X900-40-1.5	100 × 900	40	1.5

Dimensions in mm: W width, H height, T thickness.

Cable tray reducer, right, perforated, with clamping lid 21 sizes

CST-CT105



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT105-100X500-75-1.5-HDG

Part No.	W1 × W2	H	T	Part No.	W1 × W2	H	T
CST-CT105-100X200-50-1.5	100 × 200	50	1.5	CST-CT105-100X600-75-1.5	100 × 600	75	1.5
CST-CT105-100X300-50-1.5	100 × 300	50	1.5	CST-CT105-100X750-75-1.5	100 × 750	75	1.5
CST-CT105-100X400-50-1.5	100 × 400	50	1.5	CST-CT105-100X900-75-1.5	100 × 900	75	1.5
CST-CT105-100X500-50-1.5	100 × 500	50	1.5	CST-CT105-100X200-100-1.5	100 × 200	100	1.5
CST-CT105-100X600-50-1.5	100 × 600	50	1.5	CST-CT105-100X300-100-1.5	100 × 300	100	1.5
CST-CT105-100X750-50-1.5	100 × 750	50	1.5	CST-CT105-100X400-100-1.5	100 × 400	100	1.5
CST-CT105-100X900-50-1.5	100 × 900	50	1.5	CST-CT105-100X500-100-1.5	100 × 500	100	1.5
CST-CT105-100X200-75-1.5	100 × 200	75	1.5	CST-CT105-100X600-100-1.5	100 × 600	100	1.5
CST-CT105-100X300-75-1.5	100 × 300	75	1.5	CST-CT105-100X750-100-1.5	100 × 750	100	1.5
CST-CT105-100X400-75-1.5	100 × 400	75	1.5	CST-CT105-100X900-100-1.5	100 × 900	100	1.5
CST-CT105-100X500-75-1.5	100 × 500	75	1.5				

Dimensions in mm: W width, H height, T thickness.

Vertical fittings

Cable tray 90° vertical outside bend, perforated 34 sizes

CST-CT028



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT028-225-50-1.2-HDG

Side height H (mm) → cells show sheet thickness T (mm)				
Width W (mm)	H 50	H 100	H 125	H 150
50	2.0	2.0	–	–
100	1.2 / 1.5 / 2.0	2.0	–	–
150	1.2 / 1.5 / 2.0	2.0	2.0	–
225	1.2	–	–	–
300	1.2	2.0	2.0	–
400	1.5	–	–	–
450	–	2.0	–	–
600	1.5	2.0	–	2.0
800	2.0	–	–	–

Bend radius R 150, 300, 450, 600, 900 mm (radius is added to the part number where more than one is offered).

Cable tray 90° vertical outside bend, perforated, with clamping lid 30 sizes

CST-CT101



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT101-250-75-1.5-HDG

Side height H (mm) → cells show sheet thickness T (mm)			
Width W (mm)	H 50	H 75	H 100
100	1.0	1.2	1.5
150	1.0	1.5	1.5
200	1.2	1.5	1.5
250	1.2	1.5	1.5
300	1.2	2.0	2.0
400	1.5	2.0	2.0
500	1.5	2.0	2.0
600	1.5	2.0	2.0
750	1.5	2.0	2.0
900	1.5	2.0	2.0

Cable tray 90° flexible outside bend, perforated, light duty 30 sizes

CST-CT062



All dimensions in mm. Every width is made in each listed side height.

W	T	H
50	1.0	15 / 40
70	1.0	15 / 40
100	1.0	15 / 40
120	1.0	15 / 40
150	1.0	15 / 40

W	T	H
200	1.2	15 / 40
225	1.2	15 / 40
250	1.2	15 / 40
300	1.2	15 / 40
400	1.5	15 / 40

W	T	H
450	1.5	15 / 40
500	1.5	15 / 40
600	1.5	15 / 40
750	1.5	15 / 40
900	1.5	15 / 40

- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT062-120-40-1.0-HDG

Cable tray 90° flexible outside bend, perforated, medium duty 15 sizes

CST-CT070



All dimensions in mm. Every width is made in each listed side height.

W	T	H
50	1.0	25
70	1.0	25
100	1.0	25
120	1.0	25
150	1.0	25

W	T	H
200	1.2	25
225	1.2	25
250	1.2	25
300	1.2	25
400	1.5	25

W	T	H
450	1.5	25
500	1.5	25
600	1.5	25
750	1.5	25
900	1.5	25

- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT070-120-25-1.0-HDG

Cable tray 90° flexible outside bend, perforated, heavy duty 69 sizes

CST-CT075



Side height H (mm) → cells show sheet thickness T (mm)

Width W (mm)	H 40	H 50	H 60	H 75	H 100
50	1.0	1.0	–	–	–
70	1.0	1.0	–	–	–
100	1.0	1.0	1.2	1.2	1.5
120	1.0	1.0	1.2	1.2	1.5
150	1.0	1.0	1.5	1.5	1.5
200	1.2	1.2	1.5	1.5	1.5
225	1.2	1.2	1.5	1.5	1.5
250	1.2	1.2	1.5	1.5	1.5
300	1.2	1.2	1.5	2.0	2.0
400	1.5	1.5	1.5	2.0	2.0
450	1.5	1.5	1.5	2.0	2.0
500	1.5	1.5	2.0	2.0	2.0
600	1.5	1.5	2.0	2.0	2.0
750	1.5	1.5	2.0	2.0	2.0
900	1.5	1.5	2.0	2.0	2.0

- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT075-120-60-1.2-HDG

Cable tray 90° flexible outside bend, perforated, reinforced, heavy duty 39 sizes

CST-CT092



Side height H (mm) → cells show sheet thickness T (mm)

Width W (mm)	H 60	H 75	H 100
100	1.0	1.0	1.0
120	1.0	1.0	1.0
150	1.0	1.0	1.0
200	1.0	1.0	1.0
225	1.0	1.0	1.0
250	1.2	1.2	1.2
300	1.2	1.2	1.2
400	1.2	1.5	1.2
450	1.2	1.5	1.2
500	1.5	1.5	1.5
600	1.5	1.5	1.5
750	1.5	1.5	1.5
900	1.5	1.5	1.5

- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT092-200-75-1.0-HDG

Cable tray 90° flexible outside bend, perforated, turned-in edge (KT3 profile), heavy duty 13 sizes

CST-CT082



All dimensions in mm. Every width is made in each listed side height.

W	T	H	W	T	H	W	T	H
100	1.0	40	250	1.2	40	600	1.5	40
120	1.0	40	300	1.2	40	750	1.5	40
150	1.0	40	400	1.2	40	900	1.5	40
200	1.0	40	450	1.2	40			
225	1.0	40	500	1.5	40			

- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT082-200-40-1.0-HDG

Cable tray 90° vertical inside bend, perforated 34 sizes

CST-CT025



Side height H (mm) → cells show sheet thickness T (mm)

Width W (mm)	H 50	H 100	H 125
50	2.0	2.0	–
100	1.2 / 1.5 / 2.0	1.2 / 2.0	–
150	1.2 / 1.5 / 2.0	2.0	2.0
225	1.2	–	–
300	1.2	2.0	2.0
400	1.5	–	–
450	–	2.0	–
600	1.5	2.0	2.0
800	2.0	–	–

Bend radius R 50, 150, 300, 450, 600, 900 mm (radius is added to the part number where more than one is offered).


- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT025-225-50-1.2-HDG

Cable tray 90° vertical inside bend, perforated, with clamping lid 30 sizes

CST-CT102



Side height H (mm) → cells show sheet thickness T (mm)

Width W (mm)	H 50	H 75	H 100
100	1.0	1.2	1.5
150	1.0	1.5	1.5
200	1.2	1.5	1.5
250	1.2	1.5	1.5
300	1.2	2.0	2.0
400	1.5	2.0	2.0
500	1.5	2.0	2.0
600	1.5	2.0	2.0
750	1.5	2.0	2.0
900	1.5	2.0	2.0

- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT102-250-75-1.5-HDG

Cable tray 90° flexible inside bend, perforated, light duty 30 sizes

CST-CT061



All dimensions in mm. Every width is made in each listed side height.

W	T	H	W	T	H	W	T	H
50	1.0	15 / 40	200	1.2	15 / 40	450	1.5	15 / 40
70	1.0	15 / 40	225	1.2	15 / 40	500	1.5	15 / 40
100	1.0	15 / 40	250	1.2	15 / 40	600	1.5	15 / 40
120	1.0	15 / 40	300	1.2	15 / 40	750	1.5	15 / 40
150	1.0	15 / 40	400	1.5	15 / 40	900	1.5	15 / 40

- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT061-120-40-1.0-HDG

Cable tray 90° flexible inside bend, perforated, medium duty 15 sizes

CST-CT071



All dimensions in mm. Every width is made in each listed side height.

W	T	H	W	T	H	W	T	H
50	1.0	25	200	1.2	25	450	1.5	25
70	1.0	25	225	1.2	25	500	1.5	25
100	1.0	25	250	1.2	25	600	1.5	25
120	1.0	25	300	1.2	25	750	1.5	25
150	1.0	25	400	1.5	25	900	1.5	25

- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT071-120-25-1.0-HDG

Cable tray 90° flexible inside bend, perforated, heavy duty 69 sizes

CST-CT076



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT076-120-60-1.2-HDG

Side height H (mm) → cells show sheet thickness T (mm)

Width W (mm)	H 40	H 50	H 60	H 75	H 100
50	1.0	1.0	–	–	–
70	1.0	1.0	–	–	–
100	1.0	1.0	1.2	1.2	1.5
120	1.0	1.0	1.2	1.2	1.5
150	1.0	1.0	1.5	1.5	1.5
200	1.2	1.2	1.5	1.5	1.5
225	1.2	1.2	1.5	1.5	1.5
250	1.2	1.2	1.5	1.5	1.5
300	1.2	1.2	1.5	2.0	2.0
400	1.5	1.5	1.5	2.0	2.0
450	1.5	1.5	1.5	2.0	2.0
500	1.5	1.5	2.0	2.0	2.0
600	1.5	1.5	2.0	2.0	2.0
750	1.5	1.5	2.0	2.0	2.0
900	1.5	1.5	2.0	2.0	2.0

Cable tray 90° flexible inside bend, perforated, reinforced, heavy duty 39 sizes

CST-CT093



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT093-200-75-1.0-HDG

Side height H (mm) → cells show sheet thickness T (mm)

Width W (mm)	H 60	H 75	H 100
100	1.0	1.0	1.0
120	1.0	1.0	1.0
150	1.0	1.0	1.0
200	1.0	1.0	1.0
225	1.0	1.0	1.0
250	1.2	1.2	1.2
300	1.2	1.2	1.2
400	1.2	1.5	1.2
450	1.2	1.5	1.2
500	1.5	1.5	1.5
600	1.5	1.5	1.5
750	1.5	1.5	1.5
900	1.5	1.5	1.5

Cable tray 90° flexible inside bend, perforated, turned-in edge (KT3 profile), heavy duty 13 sizes

CST-CT083



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT083-200-40-1.0-HDG

All dimensions in mm. Every width is made in each listed side height.

W	T	H	W	T	H	W	T	H
100	1.0	40	250	1.2	40	600	1.5	40
120	1.0	40	300	1.2	40	750	1.5	40
150	1.0	40	400	1.2	40	900	1.5	40
200	1.0	40	450	1.2	40			
225	1.0	40	500	1.5	40			

Cable tray 90° adjustable vertical riser, perforated 7 sizes

CST-CT124



- Hot dip galvanized to EN ISO 1461 as standard; all finishes available

Example part number

CST-CT124-300-50-1.2-HDG


All dimensions in mm. Every width is made in each listed side height.

W	T	H	W	T	H	W	T	H
100	1.2	50	300	1.2	50	800	2.0	50
150	1.2	50	400	1.5	50			
225	1.2	50	600	1.5	50			

Covers

Flat cover for cable tray / ladder 34 sizes

CST-CT041



■ Clip-on or bolted; same finish as the tray

Example part number

CST-CT041-018-HDG


Part No.	W	T	L
CST-CT041-001	50	1.0	3000
CST-CT041-002	50	1.5	3000
CST-CT041-003	50	2.0	2500
CST-CT041-004	100	1.0	3000
CST-CT041-005	100	1.5	3000
CST-CT041-006	100	2.0	2500
CST-CT041-007	150	1.0	3000
CST-CT041-008	150	1.5	3000
CST-CT041-009	150	2.0	2500
CST-CT041-010	200	1.0	3000
CST-CT041-011	200	1.5	3000
CST-CT041-012	225	1.0	3000
CST-CT041-013	300	1.0	3000
CST-CT041-014	300	1.2	3000
CST-CT041-015	300	1.2	3000
CST-CT041-016	300	1.5	3000
CST-CT041-017	300	2.0	2500

Part No.	W	T	L
CST-CT041-018	400	1.2	3000
CST-CT041-019	450	1.2	3000
CST-CT041-020	450	1.2	3660
CST-CT041-021	450	1.5	3000
CST-CT041-022	450	2.0	2500
CST-CT041-023	600	1.5	3000
CST-CT041-024	600	1.5	3660
CST-CT041-025	600	2.0	2500
CST-CT041-026	600	2.0	3000
CST-CT041-027	900	1.5	1500
CST-CT041-028	900	1.5	3660
CST-CT041-029	900	2.0	1500
CST-CT041-030	900	1.5	3000
CST-CT041-031	100	1.2	3000
CST-CT041-032	250	1.0	3000
CST-CT041-033	500	1.2	3000
CST-CT041-034	750	1.5	3000

Dimensions in mm: W width, T thickness, L length.

Ventilated cover for cable tray / ladder 19 sizes

CST-CT047



■ Clip-on or bolted; same finish as the tray

Example part number

CST-CT047-010-HDG


Part No.	W	T
CST-CT047-001	300	1.2
CST-CT047-002	300	1.5
CST-CT047-003	300	2.0
CST-CT047-004	450	1.2
CST-CT047-005	450	1.2
CST-CT047-006	600	1.2
CST-CT047-007	600	1.2
CST-CT047-008	600	1.5
CST-CT047-009	150	1.5
CST-CT047-010	450	1.5

Part No.	W	T
CST-CT047-011	900	1.5
CST-CT047-012	100	1.0
CST-CT047-013	150	1.0
CST-CT047-014	200	1.0
CST-CT047-015	250	1.0
CST-CT047-016	300	1.0
CST-CT047-017	400	1.2
CST-CT047-018	500	1.2
CST-CT047-019	750	1.5

Dimensions in mm: W width, T thickness.

Peaked cover for cable tray / ladder 17 sizes

CST-CT044



■ Clip-on or bolted; same finish as the tray

Example part number

CST-CT044-009-HDG


Part No.	W	T
CST-CT044-001	450	1.2
CST-CT044-002	600	1.2
CST-CT044-003	50	1.5
CST-CT044-004	150	1.5
CST-CT044-005	300	1.5
CST-CT044-006	450	1.5
CST-CT044-007	600	1.5
CST-CT044-008	900	1.5
CST-CT044-009	100	1.0

Part No.	W	T
CST-CT044-010	150	1.0
CST-CT044-011	200	1.0
CST-CT044-012	250	1.0
CST-CT044-013	300	1.0
CST-CT044-014	400	1.2
CST-CT044-015	450	1.2
CST-CT044-016	500	1.2
CST-CT044-017	750	1.5

Dimensions in mm: W width, T thickness.

Flat cover for cable tray / ladder 90° flat bend 11 sizes

CST-CT110



■ Clip-on or bolted; same finish as the tray

Example part number

CST-CT110-400-1.2-HDG


Part No.	W	T
CST-CT110-100-1.0	100	1.0
CST-CT110-150-1.0	150	1.0
CST-CT110-200-1.0	200	1.0
CST-CT110-250-1.0	250	1.0
CST-CT110-300-1.0	300	1.0
CST-CT110-400-1.2	400	1.2

Part No.	W	T
CST-CT110-450-1.2	450	1.2
CST-CT110-500-1.2	500	1.2
CST-CT110-600-1.5	600	1.5
CST-CT110-750-1.5	750	1.5
CST-CT110-900-1.5	900	1.5

Dimensions in mm: W width, T thickness.

Flat cover for cable tray / ladder cross 11 sizes

CST-CT111



- Clip-on or bolted; same finish as the tray

Example part number

CST-CT111-400-1.2-HDG


Part No.	W	T
CST-CT111-100-1.0	100	1.0
CST-CT111-150-1.0	150	1.0
CST-CT111-200-1.0	200	1.0
CST-CT111-250-1.0	250	1.0
CST-CT111-300-1.0	300	1.0
CST-CT111-400-1.2	400	1.2

Dimensions in mm: W width, T thickness.

Part No.	W	T
CST-CT111-450-1.2	450	1.2
CST-CT111-500-1.2	500	1.2
CST-CT111-600-1.5	600	1.5
CST-CT111-750-1.5	750	1.5
CST-CT111-900-1.5	900	1.5

Flat cover for cable tray / ladder tee 11 sizes

CST-CT125



- Clip-on or bolted; same finish as the tray

Example part number

CST-CT125-400-1.2-HDG


Part No.	W	T
CST-CT125-100-1.0	100	1.0
CST-CT125-150-1.0	150	1.0
CST-CT125-200-1.0	200	1.0
CST-CT125-250-1.0	250	1.0
CST-CT125-300-1.0	300	1.0
CST-CT125-400-1.2	400	1.2

Dimensions in mm: W width, T thickness.

Part No.	W	T
CST-CT125-450-1.2	450	1.2
CST-CT125-500-1.2	500	1.2
CST-CT125-600-1.5	600	1.5
CST-CT125-750-1.5	750	1.5
CST-CT125-900-1.5	900	1.5

Flat cover for cable tray / ladder vertical tee made to order

CST-CT126



- Clip-on or bolted; same finish as the tray

Example part number


CST-CT126-HDG

Made to order. Ask us for sizes.

Made to suit the tray widths.

Flat cover for cable tray / ladder reducer, straight 7 sizes

CST-CT114



- Clip-on or bolted; same finish as the tray

Example part number


CST-CT114-100X500-1.2-HDG

Part No.	W1 x W2	T
CST-CT114-100X200-1.0	100 x 200	1.0
CST-CT114-100X300-1.0	100 x 300	1.0
CST-CT114-100X400-1.2	100 x 400	1.2
CST-CT114-100X500-1.2	100 x 500	1.2
CST-CT114-100X600-1.5	100 x 600	1.5
CST-CT114-100X750-1.5	100 x 750	1.5
CST-CT114-100X900-1.5	100 x 900	1.5

Dimensions in mm: W width, T thickness.

Flat cover for cable tray / ladder reducer, right 7 sizes

CST-CT115



- Clip-on or bolted; same finish as the tray

Example part number


CST-CT115-100X500-1.2-HDG

Part No.	W1 x W2	T
CST-CT115-100X200-1.0	100 x 200	1.0
CST-CT115-100X300-1.0	100 x 300	1.0
CST-CT115-100X400-1.2	100 x 400	1.2
CST-CT115-100X500-1.2	100 x 500	1.2
CST-CT115-100X600-1.5	100 x 600	1.5
CST-CT115-100X750-1.5	100 x 750	1.5
CST-CT115-100X900-1.5	100 x 900	1.5

Dimensions in mm: W width, T thickness.

Flat cover for cable tray / ladder reducer, left 7 sizes

CST-CT116



- Clip-on or bolted; same finish as the tray

Example part number


CST-CT116-100X500-1.2-HDG

Part No.	W1 x W2	T
CST-CT116-100X200-1.0	100 x 200	1.0
CST-CT116-100X300-1.0	100 x 300	1.0
CST-CT116-100X400-1.2	100 x 400	1.2
CST-CT116-100X500-1.2	100 x 500	1.2
CST-CT116-100X600-1.5	100 x 600	1.5
CST-CT116-100X750-1.5	100 x 750	1.5
CST-CT116-100X900-1.5	100 x 900	1.5

Dimensions in mm: W width, T thickness.

Flat cover for cable tray / ladder 90° vertical inside bend 11 sizes

CST-CT127



- Clip-on or bolted; same finish as the tray

Example part number


CST-CT127-400-1.2-HDG

Part No.	W	T	Part No.	W	T
CST-CT127-100-1.0	100	1.0	CST-CT127-450-1.2	450	1.2
CST-CT127-150-1.0	150	1.0	CST-CT127-500-1.2	500	1.2
CST-CT127-200-1.0	200	1.0	CST-CT127-600-1.5	600	1.5
CST-CT127-250-1.0	250	1.0	CST-CT127-750-1.5	750	1.5
CST-CT127-300-1.0	300	1.0	CST-CT127-900-1.5	900	1.5
CST-CT127-400-1.2	400	1.2			

Dimensions in mm: W width, T thickness.

Flat cover for cable tray / ladder 90° vertical outside bend 11 sizes

CST-CT128



- Clip-on or bolted; same finish as the tray

Example part number


CST-CT128-400-1.2-HDG

Part No.	W	T	Part No.	W	T
CST-CT128-100-1.0	100	1.0	CST-CT128-450-1.2	450	1.2
CST-CT128-150-1.0	150	1.0	CST-CT128-500-1.2	500	1.2
CST-CT128-200-1.0	200	1.0	CST-CT128-600-1.5	600	1.5
CST-CT128-250-1.0	250	1.0	CST-CT128-750-1.5	750	1.5
CST-CT128-300-1.0	300	1.0	CST-CT128-900-1.5	900	1.5
CST-CT128-400-1.2	400	1.2			

Dimensions in mm: W width, T thickness.

Flat cover for cable tray / ladder 90° flexible inside bend 11 sizes

CST-CT112



- Clip-on or bolted; same finish as the tray

Example part number

CST-CT112-400-1.2-HDG

Part No.	W	T	Part No.	W	T
CST-CT112-100-1.0	100	1.0	CST-CT112-450-1.2	450	1.2
CST-CT112-150-1.0	150	1.0	CST-CT112-500-1.2	500	1.2
CST-CT112-200-1.0	200	1.0	CST-CT112-600-1.5	600	1.5
CST-CT112-250-1.0	250	1.0	CST-CT112-750-1.5	750	1.5
CST-CT112-300-1.0	300	1.0	CST-CT112-900-1.5	900	1.5
CST-CT112-400-1.2	400	1.2			

Dimensions in mm: W width, T thickness.

Flat cover for cable tray / ladder 90° flexible outside bend 11 sizes

CST-CT113



- Clip-on or bolted; same finish as the tray

Example part number

CST-CT113-400-1.2-HDG

Part No.	W	T	Part No.	W	T
CST-CT113-100-1.0	100	1.0	CST-CT113-450-1.2	450	1.2
CST-CT113-150-1.0	150	1.0	CST-CT113-500-1.2	500	1.2
CST-CT113-200-1.0	200	1.0	CST-CT113-600-1.5	600	1.5
CST-CT113-250-1.0	250	1.0	CST-CT113-750-1.5	750	1.5
CST-CT113-300-1.0	300	1.0	CST-CT113-900-1.5	900	1.5
CST-CT113-400-1.2	400	1.2			

Dimensions in mm: W width, T thickness.



PRODUCT CATALOGUE 2026

Cable Management Systems

ADDRESS

Cerkesli Mah. Tavsancil Sok. No 72
Dilovasi, Kocaeli, Turkey

PHONE

+90 552 520 40 10

EMAIL

casksteel@caskelectric.com

WEBSITE

www.caskelectric.com

